


# Product datasheet

Specifications

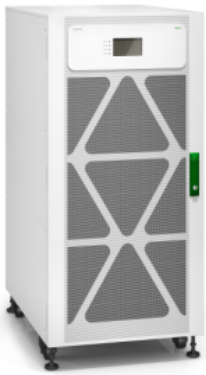

## Easy UPS 3M 200kVA 400V 3:3 UPS for external batteries, Start-up 5x8

E3MUPS200KHS

### Overview

**Presentation** Easy-to-install, easy-to-connect, easy-to-use, and easy-to-service 200 kVA 3 phase UPS with advanced product features, robust electrical specifications and compact design making your business continuity easy. Ideal for small and medium data centers and other business critical applications, this UPS is EcoStruxure-ready to give you peace of mind with cloud-based remote monitoring and management. It is supplied without batteries, so you can easily customize your battery solution. Includes 5x8 start-up service.

**Lead time** Usually Ships within 6 Weeks

### Main

**Main Input Voltage** 400 V 3 phases

**Other Input Voltage** 380 V  
415 V

**Main Output Voltage** 400 V 3 phases

**Other Output Voltage** 380 V  
415 V

**Rated power in W** 200 kW

**Rated power in VA** 200 kVA

**Provided equipment** Dust filter  
Installation guide  
Start-up service

### Physical

**Colour** White (RAL 9003)

**Height** 130 cm

**Width** 60 cm

**Depth** 85 cm

**Net weight** 304 kg

**USB compatible** Yes

### Input

**Maximum input current** 336 A

**Max short time withstand current** 10 kA

**Input harmonic distortion** Less than 3 % for full load

**Load power factor** 0.5 leading to 0.5 lagging without derating

Input Power Factor at Full Load	0.99
Input voltage limits	342...477 V
Network frequency	40...70 Hz

## Output

Maximum configurable power in VA	200 kVA
Maximum configurable power in W	200 kW
Output frequency	50 Hz sync to mains 60 Hz sync to mains
Harmonic distortion	Less than 3 %
Output harmonic distortion	< 3% linear load and < 5% non-linear load
Output overload operation	10 minutes at 125% and 60 seconds at 150%
Output voltage tolerance	+/- 1 %
UPS type	Double conversion online
Wave type	Sine wave

## Environmental

Ambient air temperature for operation	0...40 °C
Relative humidity	0...95 % non-condensing
Operating altitude	0...4921 ft
Ambient air temperature for storage	-25...55 °C
Storage Relative Humidity	0...95 % non-condensing
Storage altitude	0.00...15240.00 m
Acoustic level	72 dBA
Heat dissipation	34121 Btu/h
IP degree of protection	IP20

## Batteries & Runtime

Battery type	External battery system
Number of battery filled slots	0
Number of battery free slots	0

## Communications & Management

Control panel	Touch screen LCD user interface
---------------	---------------------------------

## Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	150 cm
Package 1 Width	97.5 cm
Package 1 Length	72.5 cm
Package 1 Weight	338 kg

## Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	<a href="#">REACH Declaration</a>
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) <a href="#">EU RoHS Declaration</a>
Mercury free	Yes
China RoHS Regulation	<a href="#">China RoHS declaration</a> Product out of China RoHS scope. Substance declaration for your information
RoHS exemption information	Yes
Environmental Disclosure	<a href="#">Product Environmental Profile</a>
Circularity Profile	<a href="#">End of Life Information</a>

## Contractual warranty

Warranty	1 year on-site repair or replace with factory authorized Start-Up
----------	---

## Recommended replacement(s)